

Technical Spray  
Premium Car Care  
Additive and Cleaner

# ***PRODUCT OVERVIEW***



**senfineco**

Germany





## Welcomes to Service Car Technology Vertriebs GmbH

We are leader in the development of production processes and manufacturing of automotive components, additives and lubricants. Our engineers excel at solving complex problems and arriving at optimum solutions, which take into account modes of vehicle operation in today's driving conditions as well as the environment.

All quality, structure, manufacturing procedures and raw material used completely comply with the world standards accepted for the given manufacture. All manufacturers perform production under the trade mark «Senfineco-Germany» are certificated according to the world standard of quality IATF 16949 (former ISO/TS 16949). A distinctive feature of all «Senfineco-Germany» products and formulations is the extensive development, improvement and quality control made in Germany, which guarantees you absolute efficiency, performance and safety in all application fields. Following to the trend of development, vehicle engines and systems have become even more compact and more power efficient. It the same time it has become more time-consuming and costly to renew these systems completely, such as: fuel injection system, ignition, exhaust system and air conditioning systems. Thus, it has become even more necessary to maintain and clean these components more carefully than before to avoid costly repairs. These are precisely the tasks that modern additives and technical cleaners from Senfineco Germany take over for you. Senfineco-Germany's focus on quality, maximum satisfaction of each consumer vehicle owner and that of our professional auto service customers lays ground for the successful, mutually advantageous and long-term business relationship with your company. For your convenience for correct selection of necessary product, our special attention during design of the web side whose paid to the accuracy of all information and the maximum possible description of the products characteristics. Your suggestions and feedback are highly appreciated, carefully reviewed and used for joint business development.

**YOUR SUCCESS IS OUR MISSION**



# TABLE OF CONTENTS

Fuel System cleaner and maintenance	Page 2
Engine clean and maintenance	Page 6
Car Radiator clean and maintenance	Page 10
Car Body clean and care	Page 11
Waxing and Polishing	Page 13
Windshield clean and care	Page 16
Car Cockpit interior	Page 18
Air Freshener and Deodorizer	Page 20
Air Conditioner maintenance	Page 21
Wheel clean and maintenance	Page 22
Lubrication and Protection	Page 24
Operating and Service Fluids	Page 26
Adhesive and RTV Adhesive Selant	Page 27
Motorbike care and more	Page 30
Acrylic spray Paint	Page 32
Undercoat treatment	Page 33
Advertising and Promotional products	Page 34

# FUEL SYSTEM CLEAN AND MAINTENANCE



## 9997 MaxClean Fuel System Cleaner



cleans and eliminates deposits in the entire injection system, by the highly effective additives use with unattainable effectiveness. It is a highly effective solution with the task of enabling and maintaining maximum engine power by increasing energy output and creating optimal conditions for fuel combustion. Represents a full alternative to professional cleaning of fuel injection system.

Application: It is recommended to use Maxclean Fuel System Cleaner every 3000 Km. Can be used for acute problem solving in case of high fuel consumption or engine malfunction. Suitable for all engine types. Add the product to the tank and fill it up to about 40-60L. Drive the vehicle under normal condition.

SPC:500MLX12

Carton Dimension:275X206X250mm

ITEM NO:9997



## 9948 Power Up Octane Booster



Power up octane booster is a special additive that improves the properties of petrol. Specific combustion modifiers optimize the operation of modern high-tech petrol engines, improve combustion and boost the Octane number. Reduces detonation and starting difficulties, both of which occur when using low-octane or low-quality petrol. It reduces the emission of harmful substances and the toxicity of exhaust emissions. It promotes complete and effective fuel combustion, which indeed reduces fuel consumption. This product is recommended for engines with four-valve timing systems as well as for turbocharged engines.

APPLICATION: Add the can contents to the tank when refuelling at a ratio of 1:300 (200 ml to 60 L of fuel). Self-mixing.

SPC:300MLX24

Carton Dimension:340X230X198mm

ITEM NO:9948



# FUEL SYSTEM CLEAN AND MAINTENANCE



## 9942 Catalytic System Cleaner



Catalytic System Cleaner is a professional product of the latest generation with a universal field of application for all gasoline and diesel engine with and without DPF.

Oxidizes the carbon deposits with an active, oxygen-rich, polar solvent. Cleans the intake valves, combustion chambers, Piston tops, Cylinder head, compressor and catalyst effectively and deeply from carbon and soot deposits.

Applicable for preventive use as well as for problem solving. It is recommended to use the Catalytic System Cleaner at every service interval (10,000 KM) or as a solution in case of high consumption of fuel or engine malfunction.

APPLICATION: The application does not require a workshop visit. Add the can contents in the tank and fill it up to about 45L. Drive the vehicle under increased loads, in the speed range of > 4000U / M for 15 min. for every drive.

SPC:300MLX24

Carton Dimension:340X230X198mm

ITEM NO:9942

## 9986 Fuel Injector Cleaner



Fuel injector cleaner is a professional product of the latest generation for all gasoline engines. The injection system is cleaned by the highly effective additives used with unattainable effectiveness. Used regularly, it restores the original state of the fuel system. It eliminates deposits in injectors of all benzene vehicles. Represents a full alternative to professional cleaning of injectors, it regenerates the injection system, as well as the fuel delivery components. Restores the performance of the engine to the original set up parameters.

APPLICATION: Add to tank before refuel, 300 ml of cleaner to 50 l of petrol. Do not refill the tank until all the fuel is used. For very contaminated fuel system, a decrease of power can occur. In this case it is necessary to replace the fuel filter and the cleaning process should be repeated again.

SPC:300MLX24

Carton Dimension:340X230X198mm

ITEM NO:9986



## 9947 Water Emulgator - Fuel Tank Additive



Water Emulgator dissolves condensate water inside the fuel tank and therefore prevents bacteria growth. Prevents corrosion and ensures a clean fuelsystem. Guarantees a reliable engine starting even after downtimes up to 2 years. Stabilized fuel burns safely and without limitations. Prevents corrosion of the filter, pipes and injectors. Always read the instructions on the label before adding the product. Do not add more than prescribed, this may have an adverse effect. Suitable for: built-in motors, outboards, cars, campers, motorcycles, snowmobiles, tractor, petrol lawn mower.

APPLICATION: Add the can contents to the tank when refuelling at a ratio of 1:300. Self-mixing.

SPC:300MLX24

Carton Dimension:340X230X198mm

ITEM NO:9947



# FUEL SYSTEM CLEAN AND MAINTENANCE



## 9916 Diesel CDI System Cleaner



Diesel CDI System Cleaner is a professional and special product that has been developed for all engines with common rail injection and system pump injector. It is suitable for all diesel and turbo diesel engines, with or without particle filter (DPF). This additive mixture makes it possible to clean, dissolve and effectively protect all types of residues, including rubbers and carbon deposits, from new formation. Effectively combats condensate moisture, emulsifies water particles with the fuel in the fuel tank, eliminates corrosion and wear, keeps the entire system clean. Reduces fuel consumption through efficient cleaning. Restores the performance of the engine to the original set up parameters. Provides a complete alternative to professional cleaning without dismantling the entire circuit. For prophylactic use it is recommended to use every 15.000 Km, add to tank before refuel, 300 ML of cleaner to 50 L of diesel.

CPC:300MLX24

Carton Dimension : 340X230X198mm

ITEM NO: 9916

## 9985 Diesel Injector Cleaner



Diesel injector cleaner is a professional product of the latest generation for all diesel engines. The injection system is cleaned by the highly effective additives used with unattainable effectiveness. Used regularly, it restores the original state of the fuel system. It eliminates deposits in injectors of all diesel vehicles. Represents a full alternative to professional cleaning of injectors, it regenerates the injection system, as well as the fuel delivery components. Restores the performance of the engine to the original set up parameters. APPLICATION: Add to tank before refuel, 300 ml of cleaner to 50 l of diesel. Do not refill the tank until all the fuel is used. For very contaminated fuel system, a decrease of power can occur. In this case it is necessary to replace the fuel filter and the cleaning process should be repeated again.

SPC:300MLX24

Carton Dimension:340X230X198mm

ITEM NO:9985



## 9923 DPF Regenerator



Professional product developed as replacement for soot filter fluids used by various manufacturers in on-board dosing systems. The DPF Regenerator makes it possible to burn low quality Diesel with high sulphur content completely and cleaner at a lower combustion temperature. Soot particles and sulphuric acid will be eliminated before they occur. So not only the particle filter (DPF) will be protected as well the engine oil will be kept clean and protected from ageing and oxidation in order to carry out the tasks to be performed to the full extent. As it is a universal product it can be used in most diesel cars with and without onboard dosing system for DPF regeneration. Please follow the dosage instructions on the packaging. Add the product to the fuel in the ratio 1:1000 (60ml for 60L). Repeat application every 2,000 km. Ref.: EOLYS DPX 42/176; PSA DPF Fluid C973685; VW G052143A2; FORD 1337646

CPC:80MLX120

Carton Dimension : 340X330X148mm

ITEM NO: 9923





# FUEL SYSTEM CLEAN AND MAINTENANCE




## 9920 Diesel Intake System Cleaner

The Diesel Intake System Cleaner removes typical contamination and deposits in the entire air intake, combustion and exhaust system: eliminating soot residues and carbon deposits on the working surface of the Diesel Particle Filter (DPF), combustion chamber, cleans carbon deposits in the ERG valve and turbo charger. To ensure reliable operation and improved performance of all gasoline engines we recommend to use this professional product every 15.000 Km. It restores the optimal exhaust gases purification and decreases fuel consumption. Helps to clean the oxygen sensor electrodes (lambda probe). Its prolongs the service life of the diesel particle filter and the combustion system.

CPC:450MLX12

Carton Dimension : 240X380X165mm

ITEM NO: 9920

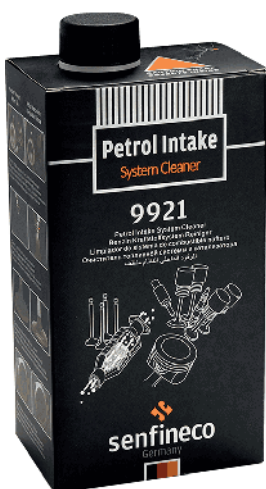

## 9921 Petrol Intake System Cleaner

The Petrol Intake System Cleaner removes typical contamination and deposits in the entire air intake, combustion and exhaust system: eliminating soot residues and carbon deposits on the working surface of the catalyst Ceramic-core converter, combustion chamber, cleans carbon deposits in the ERG valve and piston ring grooves. To ensure reliable operation and improved performance of all gasoline engines we recommend to use this professional treatment every 15.000 Km. It restores the optimal exhaust gases purification and decreases fuel consumption. Helps to clean the oxygen sensor electrodes (lambda probe). Its prolongs the service life of the catalytic converter and the combustion system.

CPC:450MLX12

arton Dimension : 240X380X165mm

ITEM NO: 9921





## 9910 Engine Oil Treatment + MoS2



Is a highly effective additive for modern engine oils of gasoline and diesel cars. The introduction of antifriction technology dramatically reduces friction and unnecessary overheating in the engine. The use of molybdenum disulfide MoS2 prevents direct metal-to-metal contact and increases the resistance of engine parts to wear and high temperature corrosion. Prevents the oil film from breaking, ensures favorable friction conditions, reduces fuel consumption and guarantees reliable engine operation under difficult conditions.

Shake the can before using! The can content is sufficient for 6 L engine oil. After adding to the engine oil, warm up the engine by running in idle. The addition can be made at any time.

CPC:300MLX24

Carton Dimension : 340X230X198mm

ITEM NO: 9910

## 9976 Engine Oil Treatment



Engine oil Treatment is modern, high-performance additive for viscosity stabilization of motor oils. It reduces oil consumption via piston rings and valve guides in petrol and diesel engines. It prevents blue smoke and oil mist and protects the viscosity drop down of the engine oils. Increases the compression and reduces engine noise on hydraulic tappets. It provides extra protection for high wear engines, extends the lifetime of catalytic converters.

APPLICATION: Shake the can before using! The can content is sufficient for 6 L engine oil. After adding to the engine oil, warm up the engine by running in idle. The addition can be made at any time.

SPC:300MLX24

Carton Dimension:340X230X198mm

ITEM NO:9976



## 9978 QuickStart Starting Fluid



QuickStart engine starting fluid is designed, to start the motor safely at extremely low temperatures, in humid environments, with wet spark plugs and when the battery charge is low. Ensures the start-up of all 2 & 4 stroke gasoline and diesel engines. Consists of a combination of particularly flammable substances. A proper start protects the engine, starter and battery. Economical to use.

APPLICATION: Spray directly on the air filter or into air inlet of the air filter for several seconds and start the engine immediately. For gasoline engines accelerate moderately; For diesel engines start without preglowing by accelerating thoroughly.

SPC:450MLX24

Carton Dimension:275X206X210mm

ITEM NO:9978





## 9982 Oil Stop Leak Sealant



Oil stop leak sealant regenerates rubber and plastic engine seals such as shaft seals and valve stem seals and prevents oil stains under the vehicle. Counteracts oil dilution. Reduces engine noise and oil consumption through piston. This product is compatible with any engine oil and suitable for any type of engine. The can content is sufficient for up to 6L engine oil.

APPLICATION: The product can be added at any time. After adding, run the engine until warm. Sealing first takes effect after about 600 - 800 km. To guarantee a lasting effect, renew the treatment each oil service.

SPC:300MLX24

Carton Dimension:340X230X198mm

ITEM NO:9982

## 9991 Motor Flush - Engine oil system flush



Engine oil system flush " 10 min." is a special cleaner that removes sediment, soiling, mud and wear products from engine wear. All types of oil-soluble and oil-insoluble residues are brought into suspension and removed during the following oil change. This product is mixable with any synthetic and mineral oil and is suitable for cleaning in any petrol and diesel engine with or without a catalyst and with or without a turbocharger. New oil and filter work more efficiently. Oil maintains its properties during a longer period of time, which leads to extending the engine life as a result.

APPLICATION: Shake the can before use. The agent is added into the engine oil at engine working temperature. After 10 min. of the engine operation at idle, drain the used oil, replace the oil filter and fill new oil. The content of one can is sufficient for an engine oil system with a volume up to 6 L. For flushing heavily soiled engine or lubrication system of larger volume it is allowed to use 2 cans. Using a big volume of flush for 4-cylinder engines can damage the seals and gaskets.

SPC:443MLX24

Carton Dimension:275X206X210mm

ITEM NO:9991



## 9993 9938 RTV Carburetor Cleaner



Carburetor cleaner is a highly-effective multi-purpose solvent combination that removes all kinds of difficult to remove deposits from the inner and outer surface of the carburetor, throttle valves and injection valves without dismantling. Effectively cleans all heavily soiled bare metal surfaces. Neutral towards PA66 plastic. Dissolves most plastics, rubber and car paint. This product is applicable to two- and four-stroke engines without oxygen sensor and catalyst.

APPLICATION: Remove the air filter. Shake the can. Start the engine at idle speed. Attention! Before starting the engine without a filter, make sure that it is excluded the dust and other contaminants ingress to the carburetor! During cleaning, keep the throttle lever at high engine speed; direct the jet cleaner on valves, walls and channels of the carburetor. Spray cleaner pressing the accelerator pedal periodically, do not allow engine stall at the same time. After cleaning, the engine can start badly and emit strong smoke because of burning sediments. After pressing the accelerator pedal for several time, the engine performance considerably improves.

SPC:650MLX12/400MLX24

Carton Dimension:275X208X291mm/275X206X210mm

ITEM NO:9938/9993



## 9908 Carburetor Tune-Up



Carburetor Cleaner active foam formulation is a high performance multipurpose solvent combination that removes all kinds of difficult-to-remove deposits from the carburetor inner and outer surfaces, throttle valves and injectors without disassembly. Effectively cleans all heavily soiled bare metal surfaces. Neutral towards PA66 plastic. Dissolves most plastics, rubber and car paint. This product is applicable to two- and four-stroke engines without oxygen sensor and catalyst. On older vehicles, a smooth-running carburetor is paramount in maintaining the right fuel-air mixture to keep your vehicle functioning properly. Regular inspection and cleaning is a great way to ensure this. Time between cleanings can vary depending on individual driving habits, but should be done about every time the oil is changed.

SPC:450MLX12

Carton Dimension : 275X206X210mm

ITEM NO: 9908

## 9937 DPF Foam Cleaner



For passenger car diesel engines with diesel particulate filter (DPF/FAP). Special short distance vehicles and city vehicles are primarily affected by problems with clogged diesel particulate filters. DPF Foam Cleaner is used to remedy reductions in performance and malfunctions caused by clogged diesel particulate filters. Cleaning restores the full flow capacity of the filter. Loosens and removes carbon and ash deposits accumulated in the filter. Secures optimum vehicle handling, engine performance and low fuel consumption. Not flammable. Neutral ash- and metal-free formula. Evaporates without leaving residue behind.

APPLICATION: The temperature of the particulate filter during cleaning should be less than 40 °C. Remove the temperature or pressure sensor. Insert the tube through the opening which has been made and empty in the direction of the particulate filter by using puffs in 5-10 second intervals. Wait approx. 15 minutes to allow the cleaner to take effect. After the sensor has been reinstalled, you or the workshop must initiate DPF regeneration as per the manufacturer's specifications.

SPC:500MLX12

Carton Dimension:275X206X250mm

ITEM NO:9937



## 9974 Belt Tensioner



Belt Tensioner eliminates belt slippage and squeaking, quickly and safely. Restores flexibility, extends their lifetime and protects against drying out and cracking. Not suitable for flat timing belts.

APPLICATION: Spray the Belt Tensioner to the side surfaces of the belts from approx. 20 cm and allow to act for 10min. before starting the belt drive.

SPS: 450MLX 12

Car on Dimension:275X206X250mm

ITEM NO:9974





## 9909 Copper Past Spray



Copper Past comes with outstanding anti-corrosion and lubrication properties, is designed to remove the main causes of braking noise as well as avoid the seizing of components. Keeps its properties up to 1100°C and guarantees problem free disassembly of connections after long-term operation. Suitable for brake-system, exhaust, heat exchanger, boiler, turbines, hinges, joints, screws, etc. Anti-Noise during repairs and service of brake pads, as well as corrosion protection and lubrication of components. Lubrication and separation protection before fusion, seizing of components under high thermal load. Clean the parts to be treated and apply an appropriate amount.

SPC:400MLX12

Carton Dimension : 340X220X298mm

ITEM NO: 9909

## 9914 Battery Clamp Grease




Plastic compatible special grease based on calcium soap. Protects battery poles and electrical contacts from corrosion and oxidation. For safe starting, bright lighting and longer battery life. Prevents acid damage. Good compatibility with plastics. Prevents leakage currents and reduces contact resistance. Marking according to DIN 51502 M2C-30. Temperature range: - 30 °C to + 60 °C.

SPC:400MLX12

Carton Dimension : 340X220X298mm

ITEM NO: 9914



## 9911 Radiator Complete Care



Radiator Treatment is a corrosion inhibitor designed to be used in the cooling systems of most types of water cooled internal combustion engines. It is specially formulated to inhibit the development of rust and scale and forms a protective film that lubricates water pump bearings and prevents frictional wear. Improves heat dissipation and helps to prevent coolant overheating and boiling. It mixes with all types of antifreeze and contains no acids, thus it is safe for all cooling system metal parts and hoses. Shake well before use. Add contents to the cooling system at environmental temperature. Contents 325ml will treat up to 12 liters of coolant.


SPC:325MLX24

Carton Dimension : 425X285X154mm

ITEM NO: 9911



# CAR RADIATOR CLEAN AND MAINTENANCE



## 9983 Radiator Flush

Radiator Flush is a detergent and converter mixture designed to remove limescale and contaminants in the cooling system. Restores the original cooling performance, ensures smooth operation of thermostat and regulating mechanisms. Reduces engine failure risk, fuel consumption and wear. Compatible with all anti-freezes and coolants. Does not contain any aggressive acids, is neutral towards metal, rubber and plastic. APPLICATION: Add contents to the cooling system at environmental temperature. Start up the heater. Then keep the engine running for at least 20-30 minutes. Drain the cleaner and flush out the cooling system with water. Contents will treat up to 12 liters of coolant.

SPC:325MLX24

Carton Dimension:425X285X154mm

ITEM NO:9983



## 9984 Radiator Leak-Stop

Radiator Leak-Stop was developed both as a preventive and as an acute problem solution to eliminate leaks in the engine's cooling system. Seals leaks in gaskets, clamps and small cracks in the radiator. Compatible with all anti-freezes and coolants. APPLICATION: Shake well before use. Add contents to the cooling system at environmental temperature. Start up the heater. Then drive the vehicle for at least 10 minutes. Contents will treat up to 12 liters of coolant.

SPC:325MLX24

Carton Dimension:425X285X154mm

ITEM NO:9984







## 9968 Pitch Cleaner



Pitch cleaner is used for the safe removal of bitumen coatings, asphalt crumbs. Ideal for cleaning paint and chrome surfaces, glass, glass headlights, bumpers and moldings of cars. Special organic solvents grant high penetration properties which allow it to move easily in the pores and micro cracks of treated areas.  
APPLICATION: Shake the can well. Spray the composition onto the surface and let it soak well. In case of strong contamination wipe with a damp cloth or artificial suede towel and rinse with water. Do not use on unprotected paintwork plastic surfaces.

SPC:450MLX12

Carton Dimension:275X206X210mm

ITEM NO:9968



## 9953 Insect & Sticker Remover




Insect & Sticker Remover is designed to dissolve hard to remove stains on your vehicle's surface. The powerful yet save-to-apply cleaning agent penetrates into stains lifts them off effectively. Dissolves bugs, sticker and bird dropping. Removes tough stains quickly and easily. Ideal for cleaning your vehicle after long road trips. Safe for use on all exterior metal, glass and plastic surfaces – clear coat safe. No scrubbing required – spray on, let the formula soak and wash away.

APPLICATION: Rinse excess dirt off. Spray product directly onto the residue, wait for 2 to 3 minutes. Rinse off with clear water.

SPC:450MLX12

Carton Dimension:275X206X210mm

ITEM NO:9953



## 9952 Wash & Wax Car Shampoo



Wash & Wax is a specialty car wash concentrate that washes and waxes your vehicle in one easy application. Deep cleaning foam dissolves and lifts off dirt and road grime while soft gel Carnauba Wax helps to protect your vehicle's finish. The formula protects your vehicle's finish against harsh environmental conditions and leaves a brilliant shine!

**APPLICATION:** For best results avoid washing the car in direct sunlight. Hose off heavy dirt and debris from the vehicle. Add 30ml of Wash & Wax to an empty bucket and fill up the bucket with a hose. Start at the top of the vehicle and apply soapy water to a portion of the vehicle's surface using a clean wash mitt, sponge or microfiber cloth. Rinse off with clear water. Dry with a chamois or microfiber cloth

SPC:1LX12

Carton Dimension:345X262X260mm

ITEM NO:9952

## 9951 Car Wash Shampoo



Car Wash Shampoo visibly reduces spots and streaks for a high gloss finish. The high-foaming formula is concentrated for greater cleaning action. Car wash safely lifts dirt, grime and residues caused by rain, sleet, snow and bugs leaving your vehicle with a brilliant finish. Protects waxed surfaces – will not strip or dull waxed surfaces.

**APPLICATION:** For best results avoid washing the car in direct sunlight. Hose off heavy dirt and debris from the vehicle. Add 30ml of Wash & Wax to an empty bucket and fill up the bucket with a hose. Start at the top of the vehicle and apply soapy water to a portion of the vehicle's surface using a clean wash mitt, sponge or microfiber cloth. Rinse off with clear water. Dry with a chamois or microfiber cloth.

SPC:1LX12

Carton Dimension:345X262X260mm

ITEM NO:9951



## 9950 Metal Restorer & Polish



Metal Restorer and Polish refreshes the beauty of metals that have become dull and tired looking because of surface rust, oxidation, corrosion and tarnish. It's inevitable that time will take its toll on the appearance of metals, but our polish makes it easy to bring back the original sparkle and shine of metals. It does its job by both removing surface contaminants and then polishing metals to a lustrous brilliance. Recommended to restore the radiance of stainless steel, brass, bronze, copper, chrome, aluminium and other metals.

**APPLICATION:** Wash and dry surface. Apply compound onto a damp applicator or cotton towel. Rub into surface using a back and forth motion. Avoid circular motion. Remove excess polish before it dries. Polish lightly with a clean, dry cloth.

SPC:100MLX50

Carton Dimension:340X230X198mm

ITEM NO:9950





## WAXING AND POLISHING



### 9943 Waterproof Wax



Waterproof wax is our hard Carnauba wax that's amazingly easy to apply and polish off. It adds a micro protective film made from Carnauba and fortified polymer waxes and will leave a hard shell that keeps your vehicle looking great. It resists moisture and fading. The Waterproof wax applies easily by hand or machine for exceptional durability, helping protect paint finishes from weather.

APPLICATION: Wash and dry vehicle. Apply on a cool clean surface, not in direct sunlight. Apply compound onto a damp applicator or cotton towel over a small area, rub into surface using a back and forth motion. Avoid circular motion. Remove excess wax before it dries. Polish lightly with a clean, dry cloth.

SPC:300MLX20

Carton Dimension:416X279X298mm

ITEM NO:9943



### 9957 Car Wax Paste



Car Wax Paste delivers an ultra-high gloss finish to your vehicle's painted surfaces. With a formula that includes natural carnauba wax, it creates the "wet look" – a deep, lustrous shine favoured by professional auto retailers. It also forms a hard shell that keeps your vehicle looking great. It resists moisture and fading. The performance wax applies easily by hand or machine for exceptional durability, helping protect paint finishes from weather.

APPLICATION: Wash and dry vehicle. Apply on a cool clean surface, not in direct sunlight. Apply compound onto a damp applicator or cotton towel over a small area, rub into surface using a back and forth motion. Avoid circular motion. Remove excess wax before it dries. Polish lightly with a clean, dry cloth.

SPC:258MLX24

Carton Dimension:486X368X149mm

ITEM NO:9957



## 9959 Liquid Speed Wax



Liquid speed wax is a premium wax that provides a high gloss shine and a protective barrier between your car's paintwork and damaging elements such as rain, snow, sleet, mud, tar, and road grime. The spray-on water repelling fast wax formula is easier to use than conventional paste wax and can be applied to wet or dry surfaces, so you can wax and dry in one step. Restores the lacquer's protective properties, prevents scratches, enhances the original color and provides a brilliant, shine as well as a water-beading effect.

APPLICATION: Thoroughly clean car (no need to dry). Shake the can well before and frequently during use. Apply in shaded area to cool surfaces only. Spray product sparingly and evenly. Wipe surface in a circular motion using a clean, dry microfiber towel. Switch to a new towel if it becomes saturated. For superior shine, buff all surfaces with a separate clean, dry microfiber towel. Store and transport in a closed, upright position.

SPC:500gX12

Carton Dimension:336X202X258mm

ITEM NO:9959

## 9950 Metal Restorer & Polish



Metal Restorer and Polish refreshes the beauty of metals that have become dull and tired looking because of surface rust, oxidation, corrosion and tarnish. It's inevitable that time will take its toll on the appearance of metals, but our polish makes it easy to bring back the original sparkle and shine of metals. It does its job by both removing surface contaminants and then polishing metals to a lustrous brilliance. Recommended to restore the radiance of stainless steel, brass, bronze, copper, chrome, aluminium and other metals.

APPLICATION: Wash and dry surface. Apply compound onto a damp applicator or cotton towel. Rub into surface using a back and forth motion. Avoid circular motion. Remove excess polish before it dries. Polish lightly with a clean, dry cloth.

SPC:100MLX50

Carton Dimension:340X230X198mm

ITEM NO:9950



## 9958 Clean & Polish Wax Paste



Polish wax is developed for manual and mechanical processing based on carnauba wax with abrasive components. It decreases oxidation and the dulling of surfaces, adds depth of color, especially on dark-colored cars. Its leaves the paint finishes, incredibly clear and glossy with mirror-like reflections. The water-banding properties persist for many months after use.

APPLICATION: Wash and dry vehicle. Apply on a cool clean surface, not in direct sunlight. Apply compound onto a damp applicator or cotton towel over a small area, rub into surface using a back and forth motion. Avoid circular motion. Remove excess wax before it dries. Polish lightly with a clean, dry cloth.

SPC:258gX24

Carton Dimension:486X368X149mm

ITEM NO:9958





## WAXING AND POLISHING



### 9956 Scratch Remover Kit



Scratch Remover Kit offers an ideal way to repair simple damages such as scratches, swirl marks, or paint imperfections with no hassle in no time. Carefully selected abrasives remove even deep scratches from the paint and bring back a high polish finish. Using the Scratch Remover Kit is an inexpensive option for repairing automotive surface blemishes. The pastes differ in the size of the abrasives. Grinding component № 1 removes deep scratches and oxidized or dull upper layers of varnish thanks to the contained large-size abrasive components. It enables the easy removal of overspray and varnish stains during the restoration of the bodywork as well as correction of color gradations during partial painting. High gloss component № 2 removes slight scratches, minor defects of varnish-and-paint coatings and remnants of old wax. Provides a deep cleaning of the surface, removes rust and aggressive substances from varnish microcracks and chrome separate parts. Grinding Sizes: Component №1 – 2200, Component №2 – 3500

APPLICATION: Clean the surfaces to be treated. Apply on a cool, not in direct sunlight. Rub Component №1 onto small areas using a cloth or sponge until the oxidised layers, dirt and scratches have been removed. Control the progress periodically to avoid excessive material removal. Rub on the surface using a back and forth motion and avoid circular motion. For shining paintwork, and uniform paintwork apply Component №2 according to the above instruction.

SPC:1Kit(2X25g)X24

Carton Dimension:435X282X202mm

ITEM NO:9956



### 9944 Shining Solid Wax Black/ White / Silver



Shining solid Wax delivers an ultra-high gloss finish to your vehicle's painted surfaces. With a formula that contains natural Carnauba Wax, it creates a deep, lustrous shine favoured by professional auto retailers. It also forms a hard shell that keeps your vehicle looking great. It resists moisture and fading. The Shining solid Wax applies easily by hand or machine for exceptional durability, helping protect paint finishes from weather.

APPLICATION: Wash and dry vehicle. Apply on a cool clean surface, not in direct sunlight. Apply compound onto a damp applicator or cotton towel over a small area, rub into surface using a back and forth motion. Avoid circular motion. Remove excess wax before it dries. Polish lightly with a clean, dry cloth.

SPC:300gX6

Carton Dimension:496X256X205mm

ITEM NO:9944-A/9944-B/9944-C



## 9967 Glass Cleaner



Glass Cleaner delivers automotive strength cleaning for glass and mirrors leaving a streak-free, clean shine! The concentrated formula quickly and easily cuts through dirt, bug residue, tree sap and road grime on exterior glass. Use the formula on interior glass to remove smoke film or protectant over spray. It is safe for all permanently tinted windows.

APPLICATION: Shake the bottle and spray the cleaner onto the glass at a distance of 20 cm. Wipe with a dry paper towel or cloth, frequently turn it to avoid glass scratching by removed dirt. Wipe dry for a clean, streak-free shine.

SPC:500MLX12

Carton Dimension:336X202X258mm

ITEM NO:9967



## 9964 De-Icer Washer Fluid



De-icer washer fluid is an advanced ready to use winter washer fluid that enhances your driving visibility and safety by streak-free cleaning down to -45°C. Ensures a smooth wiper blade operation and reduces fulguration. Dirt, salt and ice are reliably detached and quickly removed without causing micro-scratches on the glass. This product does not contain phosphates, methanol and is biologically neutral. Comes with a pleasant citrus smell.

APPLICATION: Fill windshield washer reservoir without diluting product.

SPC:2LX6

Carton Dimension:354X240X287mm

ITEM NO:9964





## 9963 Anti-Fog



Anti-Fog prevents the fogging of the interior to ensure safe and hassle-free driving conditions regardless of the weather conditions. Further removes smoke residues and limestone formation. Fits in glove compartment, door panel or under seat. For use on automotive and marine interior glass and mirrors. Product also works great on bathroom mirrors and tiles. Duration of exposure - up to four weeks.

APPLICATION: Thoroughly clean the surface with a glass cleaner and wipe dry with a glass microfiber before applying Anti-Fog agent to the inside of a vehicle window. Spray agent on the glass and let it dry. Carefully polish the dried anti-fog agent using microfiber to deep shine. If the glass processing is performed for the first time or after a considerable period of time (over 3 month), it is recommended to repeat the procedure.

SPC:200MLX24

Carton Dimension:275X206X210mm

ITEM NO:9963

## 9965 Ice Remover



Ice remover concentrated formulation that guarantees quick ice melting on your frozen windshield during the harsh winter months. Will help reduce your scraping time so that you can be on your way in no time. Ensures smooth wiper blade sliding without leaving traces and streaks on the surface of the windshield. Neutral towards paintwork, wiper blade and other rubber, plastic and metal parts of the car.

APPLICATION: Start car and turn on defroster mode. Brush away loose snow and ice on windshield. Holding product about 30 cm away from the glass and upright, apply Ice Remover directly onto the ice or frost. If the ice is thick, use scraper to help remove the ice. Clear windshield by running wiper blades.

SPC:450MLX12

Carton Dimension:275X206X210mm

ITEM NO:9965



## 9966 Glass Foam Cleaner



Glass foam is an intensive cleaner that easily cuts through hard to remove dirt, bug residue, tree sap and road grime on exterior glass providing a sparkling clean surface. It does not leave streaks and spots, penetrate even the thinnest glass micro-scratches. Provides smooth wiper blade operation, reduces fulguration. The cleaner applies water beading technology to enhance your driving visibility in one simple step. Protects the interior glass from fogging in cold and moisture.

APPLICATION: Shake the can well and spray the cleaner onto the glass at a distance of 20 cm. Wipe with a dry paper towel or cloth, frequently turn it to avoid glass scratching by removed dirt. Wipe dry for a clean, streak-free shine.

SPC:450MLX12

Carton Dimension:275X206X210mm

ITEM NO:9966



## CAR COCKPIT INTERIOR



### 9955 Leather Protectant



Leather protectant is a special agent with a pleasant smell for effective cleaning and care of leather vehicle interiors, seats, furniture, motorcycle leather and other smooth leather products. It effectively removes external soiling and simultaneously strengthens the leather structure by deeply penetrating active substances. It restores elasticity, prevents deformation, cracking and drying out of the leather surfaces. It forms a waterproof layer that prevents slippery surfaces. It does not contain dyes and is suitable for all colors of leather goods. This product is ideally suitable for vehicles with heated seats and porous leather surfaces. The composition comprises a UV filter that protects from fading in the sun.

**APPLICATION:** Apply a small amount of the composition on a dry clean cloth or spray directly on the surface of the leather. Rub the agent into the leather surface with soft circular motions. Polish with a clean dry cloth.

SPC:500MLX12

Carton Dimension:336X202X258mm

ITEM NO:9955



### 9961 Universal Foam Cleaner



Universal foam cleaner is a highly effective cleaner that removes various soiling from furniture upholstery, vehicle interiors surface, carpets, fabric etc. It restores the original look and color, of fabric and carpet materials, brings up the pile, removes unpleasant smells and refreshes the air in the vehicle interior. Contained repellent coating prevents future spills from absorbing into the fabric for easier clean-up and stain prevention. **APPLICATION:** Do not use on suede, genuine leather, silk, velvet or clear plastic. For other fabrics, test on a hidden area prior to use. If color or texture is affected, do not use. Shake well before use, spray onto the surfaces to be cleaned to produce a foam. Allow to act depending on the degree of contamination (2-5 minutes). Rub in using a brush in order to remove stubborn contaminants. Wipe off residues with a damp sponge (clear water) or allow to dry and then vacuum. Allow at least 12 hours to dry.

SPC:500MLX12

Carton Dimension:336X202X258mm

ITEM NO:9961



## 9988 Upholstery Foam Cleaner



Upholstery foam cleaner is a highly effective cleaner that removes various soiling from furniture upholstery, vehicle interiors, carpets, fabric etc. It restores the original look and color, of fabric and carpet materials, brings up the pile, removes unpleasant smells and refreshes the air in the vehicle interior. This product prevents re-soiling thanks to its antistatic properties.

APPLICATION: Shake well before use. Apply foam directly onto the surfaces to be cleaned. Allow to act depending on the degree of contamination (2-5 minutes). Rub in using a brush in order to remove stubborn contaminants. Wipe off residues with a damp sponge (distilled water) or allow to dry and then vacuum. Repeat process in case of heavy soiling.

SPC:650MLX12

Carton Dimension:275X208X291mm

ITEM NO:9988

## 9989 9918 Cockpit Cleaner



Cockpit cleaner is designed to protect the dashboard from cracking and drying out. Returns the original shine to all plastic, vinyl and rubber trim elements. It has excellent cleaning properties and leaves a pleasant fresh smell inside the car. It forms a durable polymer layer of silicone which gives the surface excellent waterproof, antistatic and UV-resistant properties. This product can be used for the care of interior coverings made of synthetic material and plastic.

APPLICATION: Shake well before use. To ensure an optimal cleaning result apply the product to a dry cloth initially, prior to surface treatment. It is not recommended to spray directly onto the surface.

SPC:650MLX12/220MLX24

Carton Dimension:275X208X291mm

ITEM NO:9989



## 9990 Silicone Spray



Silicone spray is a mineral-oil free, grease-free release agent, lubricant and protective coating based on silicones dissolved in chlorine-free solvents. It protects, lubricates and insulates all surfaces by means of a transparent, permanent protective film. Restores the elasticity of rubber, preventing freezing doors and trunk lid in the winter. Lubricates the rollers and the seat belt.

APPLICATION: Shake the bottle before use. Apply the spray to the treated surface from a distance of 10-15 cm. If necessary, repeat the treatment. Avoid contact with painted surfaces and food.


SPC:450MLX24

Carton Dimension:275X206X210mm

ITEM NO:9990



# AIR FRESHENER AND DEODORIZER

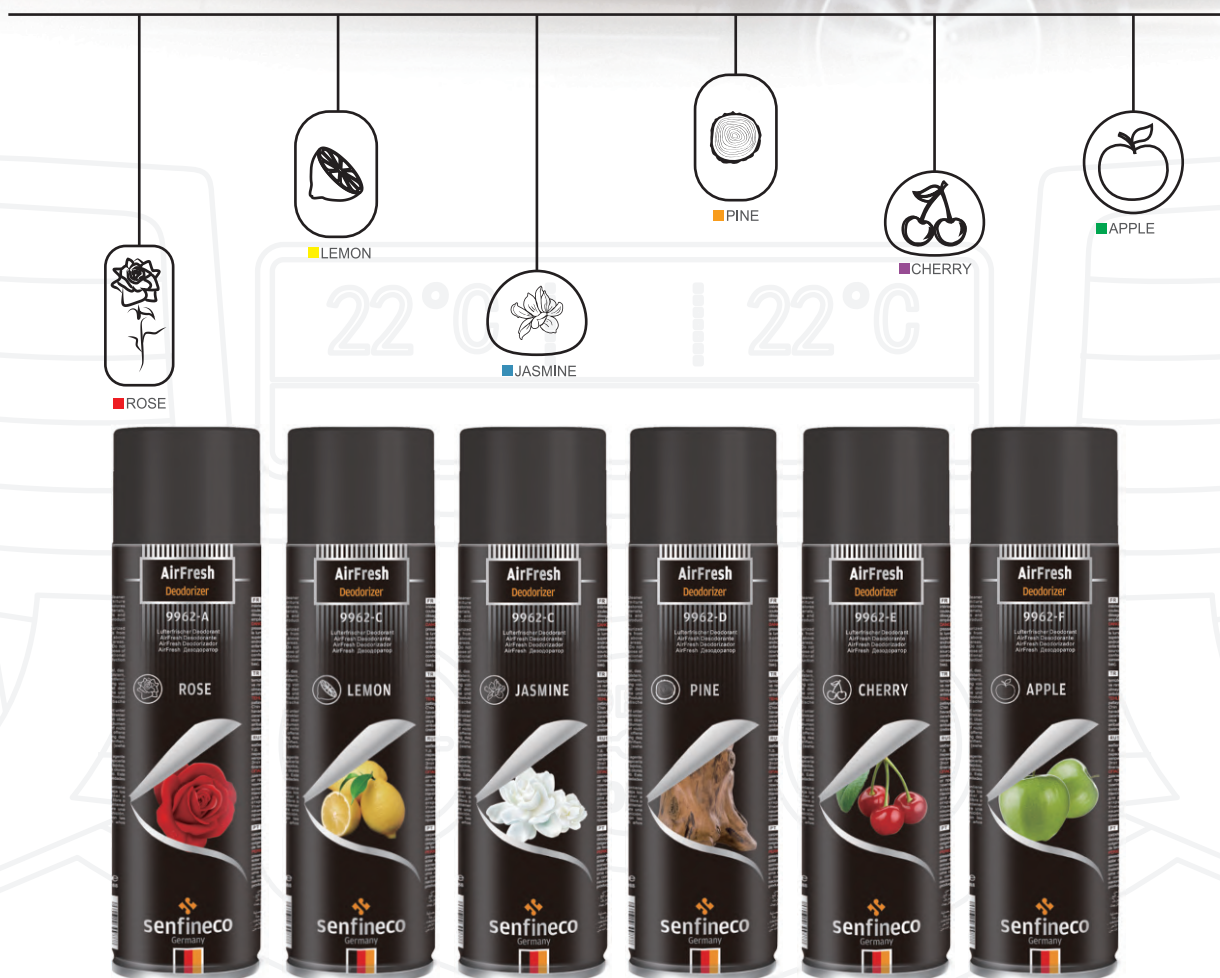

## 9962 Air Freshener Deodorizer

AirFresh removes unpleasant odours wherever they hide, while leaving behind a pleasant scent. The odour eliminating chemistry works at the molecular level to permanently remove foul smells like cigarette smoke, wet dog, workout gear and more. Unpleasant odors do not return even when humidity increases.

SPC:380MLX24

Carton Dimension:340X230X283mm

ITEM NO:9962-A~9962-F





## AIR CONDITION MAINTINACE



### 9980 Air Conditioner Fresh and Clean



Air Conditioner Fresh and clean removes unpleasant odours that are caused by bacteria and mold in air conditioning systems, ventilation ducts or vehicle interiors within minutes. Easy to use - no need to disassemble the pollen or dust filter. Leaves a pleasant, fresh aroma behind. Use biocides safely. Always read the label and product information before use.

APPLICATION: Shake the can well before use. Place the Air-Con Fresh in the intake area of the air circulation system (mostly passenger footwell in the rear) and switch air distribution to windshield. Then press the spray head until it locks. Keep windows and doors closed for 10 minutes. Switch off the engine and ventilate the interior for 10 minutes.

SPC:200MLX24

Carton Dimension:275X206X210mm

ITEM NO:9980

### 9981 A/C System Cleaner



A/C system cleaner effectively cleans and disinfect all surfaces of the air conditioning system, cleans from moulds, pathogen micro-organisms and viruses. Eliminates unpleasant smells caused by such undesirable pathogens. Forms a protective film to permanently protect from bacterial recolonization and unpleasant smell. Applicable for automobile and household air conditioners. Improves the microclimate in the vehicle cabin or indoors. Can is sufficient for one-time application. Store at temperatures > +5°C. Use biocides safely.

APPLICATION: Switch ventilation off. Remove the cabin filter and insert the probe approx. 30 cm through the now exposed air inlet opening. Spray 2/3 of the product directly on the evaporator. Insert the probe into the upper ventilation openings and empty the product. It is also possible to apply the product through the holes for condensate drain (drainage). Leave to act for 20 min, then dry the A/C System by turning the heater to the maximum temperature. May be harmful if inhaled. Replace the dust or pollen filter after the treatment.

SPC:520MLX12

Carton Dimension:275X206X250mm

ITEM NO:9981



### 9949 R-134a Freon Refrigerant



The air conditioning gas R-134a replaces lost refrigerant in the vehicle air conditioner. It contains no impurities and has no negative effects of erosion on the cooling system. R-134a is a fully synthetic, environmentally friendly refrigerant with no negative effect on the ozone layer. Replaces the R12 refrigerant gas.

SPC:300MLX24

Carton Dimension:415X360X155mm

ITEM NO:9949





## 9987 TireFix Tire Repair Sealant



TireFix is designed for the tool-free emergency repair of tire punctures for all common automobile and caravan tire sizes. It removes reliably and quickly air leaks in pierced tires with a diameter of up to 5 mm by creating a durable vulcanized film.

**APPLICATION:** Remove the cause of the puncture (e.g. nails, screws) if possible, turn the wheel with the leakage downwards and fully release the air from the wheel. Shake the can well. Pre-heat the can (vehicle heater system, in your hands) in cold conditions. Connect the hose to the valve. Hold the can as vertical as possible and spray the complete content into the tire. Do not apply in the case of very large holes, the destruction of the tires, or if it slides from the disk. Drive at a speed of 10-15 km/h right away so that the agent may spread optimally within the tire. Drive at an average speed of up to 70 km/h afterwards. Check the air pressure regularly. Contact a repair shop to have the tire mended professionally. Report at the workshop that a flammable gas is in the tire-service must be carried out in a well-ventilated area, without access of fire.

SPC:450MLX24

Carton Dimension:275X206X210

ITEM NO:9987





# WHEEL CLEAN AND MAINTENANCE



## 9960 Wheel Cleaner



Wheel cleaner delivers most powerful cleaning performance being also safe for all wheel and brake finishes! This advanced chemistry blends road grime attacking surfactants with active brake dust dissolving agents. The deep-cleaning foam formula turns brake dust purple and road grime brown as it gently loosens stubborn contaminants. And since it's acid free and pH balanced this wheel cleaner is safe and effective for all wheel finishes and painted brake components.

APPLICATION: Shake well before use and spray Wheel Cleaner evenly on the soiled rims. Depending on the degree of soiling allow to act for 5 to 7 min, but do not let dry on the surface. In case of stubborn soiling use sponge or brush during the cleaning process. Thoroughly rinse the soiling and the detergent residues with a strong water jet.

SPC:500MLX12

Carton Dimension:336X202X258mm

ITEM NO:9960

## 9979 9917 Tire Shine Foam Cleaner



Tire shine foam cleaner restores the tires original look without brush and water. Contains an increased amount of active detergents and polymers that protect the rubber long-lasting. Cleans, highlights the dark tire color and protects the tires from aging and cracking. Forms an abundant foam that has high penetrating properties. Easily removes dirt and road dust from the tire. Forms a shiny, black color protective film on the rubber surface. APPLICATION: Shake can vigorously before use. Spray tire shine thinly and evenly onto the surface and allow to act for a few minutes. Rinse off with water if necessary. After treatment is over, test brakes at a moderate speed since any silicone film which may have deposited on the brake discs must be removed for the brakes to operate to optimum effect.

SPC:650MLX12

Carton Dimension:275X208X291mm

ITEM NO:9979



## 9994 9994EU Brake & Part Cleaner



Brake and Parts Cleaner is used for cleaning and degreasing small components in the automotive and industrial sector. Brakes, clutches, transmissions and for assembly and repair work. Removes oil and grease stains from floor coverings, fabrics and clothes. Because of its universal properties, Brake and Parts Cleaner has many areas of use in industry, the workshop, agriculture and for hobbies, etc. Evaporates quick and residue free. Neutral towards rubber, nylon and plastic parts. Easy-to-use on difficult to reach places thanks to the 360° valve.

APPLICATION: Spray onto the contaminated components and allow to drain off and evaporate.

SPC:600MLX24

Carton Dimension:275X208X291mm

ITEM NO:9994



## 9995 Quick Rust Remover



Quick rust remover has excellent anti-frictional properties. It is designed for wide use in all moving assembly mechanisms. Thanks to the quickly penetrating solvents and thin lubricants contained within the composition, it removes rust from threaded connections within seconds. This product does not harm rubber and plastic surfaces.

APPLICATION: Shake the bottle before use. Spray quick rust remover on the work piece from a distance of 15-20cm and allow to act for a few minutes. In case of a high corrosion degree, remove dirt and loose rust using rough sandpaper or a metal brush first and spray quick rust remover in several stages at least every two minutes. For hard to reach places extension pipe is attached.

SPC:450MLX24

Carton Dimension:275X206X210mm

ITEM NO:9995



## 9977 Spray Grease



White lithium grease with a universal field of application in lubrication and excellent low and high temperature properties. The formed soft layer of non-tacky grease adheres tightly to the contact point, reduces the friction of the parts and protects against dirt, water ingress, in winter prevents freezing of parts. Applicable for automotive door locks, trunk locks and bonnets. It is extremely adhesive, provides reliable corrosion protection and is age and squeeze-stable. Guarantees long-term lubrication security.

APPLICATION: Shake the can well. Spray the grease on the workpieces from a distance of 10-15cm. If necessary, repeat the treatment.

SPC:450MLX24

Carton Dimension:275X206X210mm

ITEM NO:9977





## 9939/9940/9996 Multi Lubricant



SD-40 Multifunction lubricates, cleans and prevents corrosion on all surfaces as well as on moving parts. It displaces moisture, dissolves rust and soiling, prevents short circuits and leakage currents, protects surfaces against corrosion and ensures smooth running of moving parts. It is neutral towards rubber, plastic, varnish and metal surfaces.

APPLICATION: Before processing clean surface from dirt and loose rust mechanically. Spray lubricant onto the surface from a distance of 10-20 cm and allow to act. Neutral towards rubber, wood, plastic, paint, varnish, chrome finish and metals. Recommended for use at service stations, industry, automobiles and household.

SPC:100MLX24/200MLX24/400MLX12/450MLX12

Carton Dimension:275X206X210mm

ITEM NO:9939/9940/9996





## 9954 Automatic Transmission Cleaner



AT Cleaning Fluid is a solvent-free compound that safely removes sediment, soiling, mud and wear products. All types of oil-soluble and oil-insoluble residues are brought into suspension and removed during the following automatic transmission service. Recommended before every oil change. Reduces the required transmission fluid used during transmission oil change. The fresh oil maintains its properties during a longer period of time and the filter is going to work more efficiently, which in result leads to an extended gearbox life time. This product is mixable with all synthetic and mineral transmission fluids. Suitable for all automatic transmissions.

**APPLICATION:** Before changing the automatic transmission fluid, add the contents of the can to the gear oil when it is at operating temperature through the dipstick opening using a funnel. Allow the engine to run in neutral for approx. 10 minutes and shift through all gears at least twice with the vehicle in a stationary position. Change the oil and filters after cleaning. Contents of can are sufficient to treat 6-9 liters of oil. Can be added to the gear oil through the dipstick opening using a funnel or used in all commercial automatic transmission cleaning devices.

SPC:300MLX24

Carton Dimension:340X230X198mm

ITEM NO:9954



## ATF92EA ATF Changer Automatic w. Database

The properties of the oil and coolant used in an automatic transmission deteriorate over time. If the transmission oil is not changed in time, its function as a transmission fluid is no longer fully guaranteed. This has a very negative effect on the transmission properties. Due to design problems, it is not always possible to drain off the entire quantity of fluid when changing the transmission oil manually. The ATF92EA is a fully automatic and high quality transmission service station for the maintenance and replacement of gearboxoil in the professional workshop. Due to design problems, it is usually not possible to drain the entire transmission oil. Our fully automatic ATF92EA transmission.



# ADHESIVE AND RTV ADHESIVE SEALANT



## 7001 Epoxy Steel



2K Epoxy glue for metal - is designed for quick and reliable structural bonding of steel, aluminium, brass, copper, iron, tin, lead and various alloys within 5 minutes. Excellent water resistance. The product develops high strength on a variety of materials and is water resistant. This adhesive is a general purpose adhesive that is ideal for many DIY applications. Due to its medium viscosity and fast fixing at room temperature it is easy to apply.

CPC:30g X144

Carton Dimension : 432X432X348mm

ITEM NO: 7001



## 7002 Epoxy Plastic



2K Epoxy Plastic Bonder - is a two-component adhesive, suitable for professional use due to its quick fastening and mechanical resistance when bonding of all types of plastic parts (PVC, ABS/PC, PET and Acrylic): bumpers, headlights, rear lights, radiator, brackets, spoilers etc. Excellent water resistance. The product develops high strength on a variety of materials and is water resistant. This adhesive is a general purpose adhesive that is ideal for many DIY applications. Due to its medium viscosity and fast fixing at room temperature it is easy to apply.

CPC:30g X144

Carton Dimension : 432X432X348mm

ITEM NO: 7002



# ADHESIVE AND RTV ADHESIVE SEALANT



## 9930 RTV Gasket Maker Black



Neutral curing RTV silicone sealant to replace or reinforce seals. Does not cause corrosion on metal surfaces, electrical circuits or sensors. Excellent resistance to vibration and shock. Outstanding resistance to constant contact with hot oils. High-temperature resistant up to 270 °C (short term). Covers and seals gaps of up to 6 mm. Skin formation time 15 min, curing time 3mm / 24 hour.

CPC:100g X144

Carton Dimension : 432X432X348mm

ITEM NO: 9930

## 9931 RTV Gasket Maker Red



Neutral curing RTV silicone sealant to replace or reinforce seals. Does not cause corrosion on metal surfaces, electrical circuits or sensors. Excellent resistance to vibration and shock. Outstanding resistance to constant contact with hot oils. High-temperature resistant up to 371 °C (short term). Covers and seals gaps of up to 6 mm. Skin formation time 15 min, curing time 3mm / 24 hour.

CPC:100g X144

Carton Dimension : 432X432X348mm

ITEM NO: 9931



## 9934 RTV Gasket Maker Grey



neutral curing RTV silicone sealant to replace or reinforce seals. Does not cause corrosion on metal surfaces, electrical circuits or sensors. Excellent resistance to vibration and shock. Outstanding resistance to constant contact with hot oils. High-temperature resistant up to 350 °C (short term). Covers and seals gaps of up to 6 mm. Skin formation time 15 min, curing time 3mm / 24 hour.

CPC:100g X144/ 50gX 30

Carton Dimension : 432X432X348mm

ITEM NO: 9933 / 9934





# ADHESIVE AND RTV ADHESIVE SEALANT



## 7004 Threadlocker permanent Red



Mechanical locking devices (such as split washers, nylon nuts, flat washers) were invented to solve the common problem of loosening that happens in most threaded assemblies. In practice, the screw connection cannot be maintained under load, as assemblies "locked" with these devices often loosen under vibration, thermal expansion and/or improper torque.

CPC:10MLX144/ 50MLX70

Carton Dimension : 432X432X348mm

ITEM NO: 7004

## 7005 Threadlocker medium Blue

Mechanical locking devices (such as split washers, nylon nuts, flat washers) were invented to solve the common problem of loosening that happens in most threaded assemblies. In practice, the screw connection cannot be maintained under load, as assemblies "locked" with these devices often loosen under vibration, thermal expansion and/or improper torque.

The blue, universally applicable one-component threadlock guarantees a medium-strength connection that can be dismantled with hand tools. It hardens in the absence of air on all metals and alloys. Light soiling from oils and anti-corrosion agents is harmless. Breakaway torque on M10 steel: 26 Nm

CPC:10MLX144/ 50MLX70

Carton Dimension : 432X432X348mm

ITEM NO: 7005



## 7003 Epoxid Putty




Epoxy Putty is a 2K-putty sealant based on epoxy resin, reinforced with metal particles for quick and long-lasting repairs. Easily mixed by hand and takes any shape. Designed to repair surfaces made of any material. It can be used to eliminate leaks in the gas tank, radiator, oil pan, barrels, pipes and restore worn threads. Applicable under water. Retains its properties up to short term 260 °C. Resistant to oils, solvents and other chemicals. Processing time 15 minutes. Solid in 30 min. Complete curing 24h

CPC:50gX144

Carton Dimension : 432X432X348mm

ITEM NO: 7003



## MOTORBIKE CARE AND MORE



### 9924 9941 Chain Lube



Blue fully synthetic high temperature grease, reinforced by CeraMol technology, shows excellent low and high temperature properties, for automotive and motorcycle, fast-moving chains. The formed soft layer of non-tacky grease adheres tightly to the contact point, reduces the friction of the parts and protects against dirt, water ingress, in winter prevents freezing of chain link. It is extremely adhesive, provides reliable corrosion protection and is age and squeeze-stable. Guarantees long-term lubrication and protection. For all standard chains and chains with O-RING, X-RING and Z-RING for motorcycles, go-karts and industrial power drives.

CPC:200MLX24/ 650MLX12

Carton Dimension: 275X206X210mm

ITEM NO: 9924/ 9941



### 9925 Speed Chain Degreaser




Speed Chain Cleaner, as its name suggests, is the fastest way to clean motorcycle engines and chains. Effectively removes all encrusted deposits. Its chlorine-free extreme grease removal formula is perfectly suited to O-ring, X-ring and Z-ring chains without damage to rubber or plastic components. Makes short work of bringing back the shine to filthy chains contains citrus extracts for pleasant smell during the work. Leaves no residue and dries rapidly, lubricant can be applied immediately. To increase the lifespan of the chain, repeat the cleaning every 1000 km. Suitable for all types of chains (road and off-road) and those of other vehicles (bicycle, moped, go kart, ATV).

CPC:500MLX12

Carton Dimension: 275X206X295mm

ITEM NO: 9925





## 9939 S040 MultiLubricant



SO-40 Multifunction lubricates, cleans and prevents corrosion on all surfaces as well as on moving parts. It displaces moisture, dissolves rust and soiling, prevents short circuits and leakage currents, protects surfaces against corrosion and ensures smooth running of moving parts. It is neutral towards rubber, plastic, varnish and metal surfaces.

CPC:200MLX24

Carton Dimension: 275X206X295mm

ITEM NO: 9939

## 9959 Liquid Speed Wax



Liquid speed wax is a premium wax that provides a high gloss shine and a protective barrier between your motorbike paintwork and damaging elements such as rain, snow, sleet, mud, tar, and road grime. The spray-on water repelling fast wax formula is easier to use than conventional paste wax and can be applied to wet or dry surfaces, so you can wax and dry in one step. Restores the lacquer's protective Properties, prevents scratches, enhances the original color and provides a brilliant, shine as well as a water-beading effect.

CPC:380MLX12

Carton Dimension: 336X202X258mm

ITEM NO: 9959



## 9912 Helmet maintenance kit



Are you tired of cleaning your helmet visor and goggles with pieces of tissue or the sleeve of your jersey? Then this kit's for you! The helmet, visor, Lens and Goggle cleaning Kit is ideal for keeping in your ride pack for quick and safe cleaning on the move. It quickly removes dust, mud, insects, soot and oily residue from your helmet and goggles leaving a streak free finish. Helmet interior cleaner, Helmet & Visor Cleaner, - all the essentials a rider needs to keep their helmet in top condition throughout the season. Helmet & Visor cleaner makes quick work of dirt, dust, grime, snow, sweat or just about any residue left on your goggles, helmet, or eyewear our Helmet interior cleaner gently agitates dirt

CPC:50MLX120

Carton Dimension: 375X265X255mm

ITEM NO: 9912





# ACRYLIC SPRAY PAINT



## Acrylic Spray Paint

Suitable for painting surfaces of metal, wood, glass, plastic, carton, fabrics, ceramics, and other materials. Paint can be used for cars, motorcycles, bicycles, various equipment as well as household, hobby and everyday life. For indoor and outdoor use. Weather proof: does not crack, does not fade, does not yellow. It does not contain lead nor mercury. It is used for touch up as well as for a complete staining. It prevents corrosion and oxidation.

APPLICATION: Ideal temperature for spraying is 20°C. Thoroughly clean the area to be painted, remove rust, grease, etc. Shake aerosol well for about 2 minutes before use. Hold the can in an upright position and apply a thin coat from a distance of 40 cm in a steady motion. Wipe soiled areas immediately. Apply 2 - 3 individual coats at intervals of at least 3 minutes. After finishing the paintwork, clean the nebulizer by turning the can upside down and pressing the atomizer for a few seconds.

SPC:400MLX24

Carton Dimension:275X206X210mm

ITEM NO:

ITEM DESCRIPTION	SPECIFICATION	Carton Dimension
Normal Color	400ml*12pcs	267*202*205mm
Fluorescent	400ml*12pcs	267*202*205mm
Metallic	400ml*12pcs	267*202*205mm
Bright Gold	400ml*12pcs	267*202*205mm
Zinc Galvanizing Paint	400ml*12pcs	267*202*205mm
Bright Chrome	400ml*12pcs	267*202*205mm
Bright Chrome	350ml*24pcs	323*215*240mm
High Temperature Silver 650°C	400ml*12pcs	267*202*205mm
High Temperature Black 450°C	400ml*12pcs	267*202*205mm

# UNDERCOAT TREATMENT



## 9941 Paint Stripper Spray

With our paint stripper, paint comes off even easier than it went on. Spray a light coat of paint stripper on to almost any surface and watch as paint and varnish quickly bubble and flake. Within 5 to 15 minutes, the powerful ingredients quickly penetrate thick layers of paint, forcing them to blister. This makes it easy to scrape away the remaining residue with a putty knife, cloth or strong water spray. Paint stripper also removes enamel and varnish without harming underlying surfaces made of wood, metal, concrete, and brick - an ideal solution for the effective yet safe removal of graffiti.

SPC:450MLX24

Carton Dimension:275X206X210mm

ITEM NO:9941

## 9975 Anticor Underbody Protection

Anticor Underbody Protection is a bitumen-based coating material used as corrosion inhibitor to preserve the underbody, the wheel arches as well as the longitudinal beams, at the same time extending their working life. Recommended for repairs and sealing of exposed areas. It forms a durable and elastic black layer that protects from crushed gravel and split. It has an excellent resistance to moisture, salts, and varying temperatures. Additionally, it forms a noise-resistant and anti-vibration layer. It is applicable to iron, lacquer, anti-corrosives and hard plastics. This product forms a durable, smooth, fast-drying and indelible coating.

APPLICATION: Ideal temperature for spraying is 20°C. Thoroughly clean the area to be painted, remove rust, grease, etc. Shake aerosol well for about 2 minutes before use. Hold the can in an upright position and apply a thin coat from a distance of 40 cm in a steady motion. Wipe soiled areas immediately. Apply 2 - 3 individual coats at intervals of at least 3 minutes. After finishing the paintwork, clean the nebulizer by turning the can upside down and pressing the atomizer for a few seconds. Dries completely within 24 hours.

SPC:650MLX12/1L X12

Carton Dimension:275X208X291m

ITEM NO:9975 /9907







# ADVERTISING AND PROMOTIONAL PRODUCTS



PROMOTION



SEN-212

SEN-206



SEN-204 Cap



SEN-201 Polo Shirt

SEN-209 Calendar



SEN-207 Pen



SEN-205 Pen

## MY NOTES

This image shows a single page of white paper with horizontal ruling lines. The lines are evenly spaced and extend across the width of the page. There are no margins, text, or other markings on the paper.



## MY NOTES

[illegible]



High Performance Lubricants  
**MADE IN GERMANY**  
Only the best is good enough



**senfineco**  
Germany





[www.senfineco.de](http://www.senfineco.de)

**Service Car Technology Vertriebs GmbH**  
Hasenkamp. 4 22880 Wedel Germany  
[Info@senfinco.de](mailto:Info@senfinco.de)

STAMP DEALER :

